


JCW-CST17

Fully-auto Dual-end Wire Sealing Crimping Machine

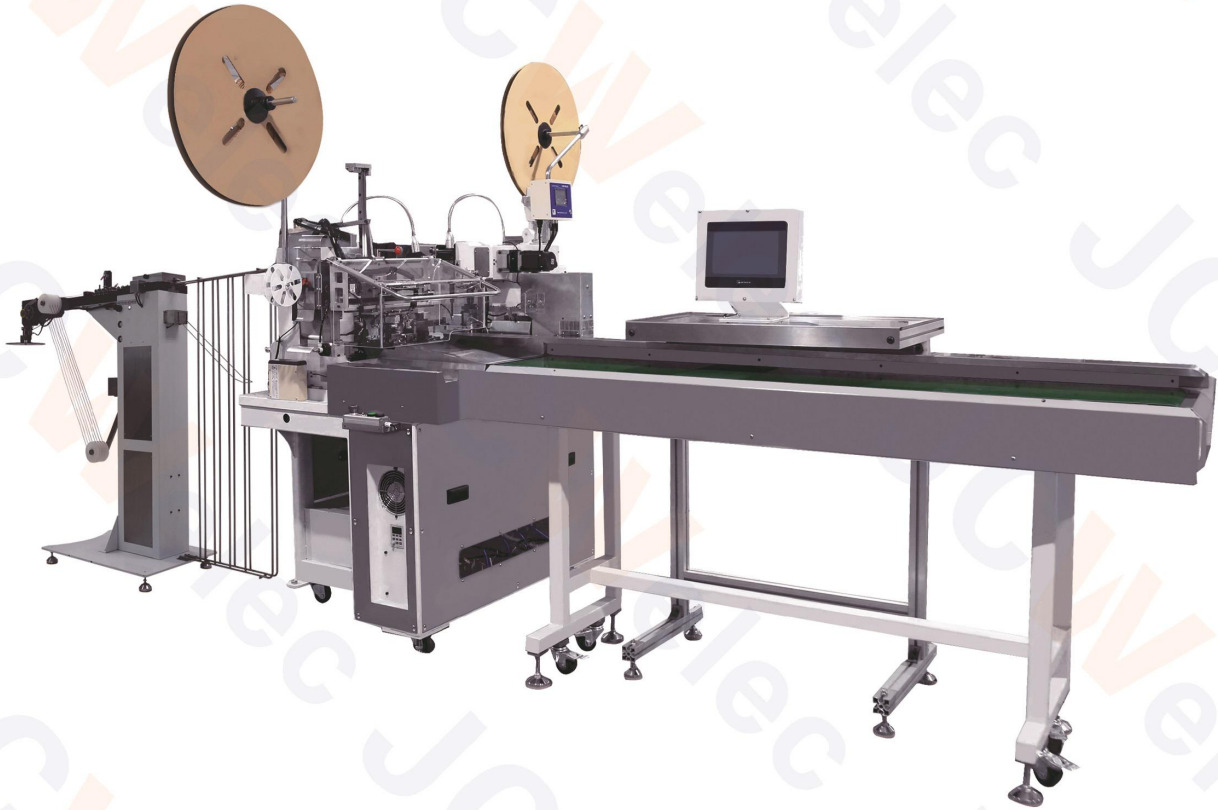

Technical Data

Function Wire measuring and cut into length, Wire stripping, sealing, crimping; Sealing alarm. Cut depth, Strip length, Crimp depth, Automatic detect and sort out defective product

| | | | |
|-----------------------------|--|--------------------------------|--------------------------------------|
| Raw material | AV, AVS, AVSS, CAVUS, KVKIV, UL | Conductor cross-section | 0.2 - 2.5 mm ² |
| Cut length (L) | 35 - 99999 mm | Cut length accuracy | 0.1 mm \pm 0.005 x L |
| Strip length | 0 - 15 mm | Crimping press | Servo motorized |
| Crimping force | 2.5 tons | Data library | 100 programs |
| Display | Color touch screen, English / Chinese [other languages on request] | | |
| Product rate | 2000 - 2500 pcs/h by 100 mm wire length [Sealing & Crimping] | | |
| Optional peripherals | Upper-computer software, CFM, CCD, Wire prefeeder, Wire stacker | | |
| Air supply | 0.5 MPa [clean and dry air], 150 ANR / min | Power supply | AC 110V - 220V \pm 10%, 50 / 60 Hz |
| Dimensions | L 1200 x W 1100 x H 2300 mm | Weight | 525KG |